


# MicroTron

## Series B

Chemical Metering Pump

***Digitally  
Accurate  
Speed  
Adjustment***

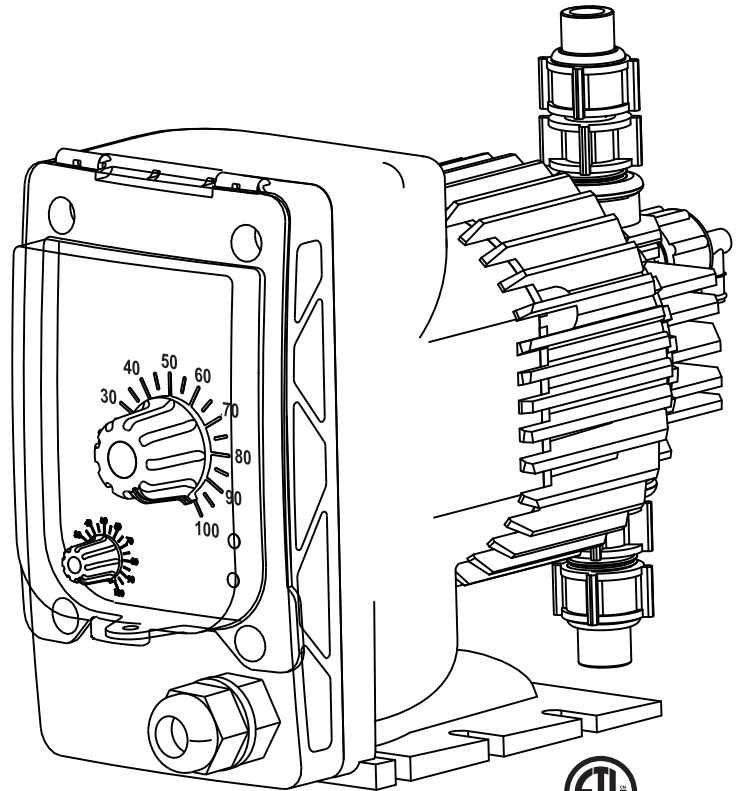

## Key Features

- Dual Output Adjustment
- NEMA 4X Style Enclosure
- Guided Double Ball Checks
- Circuit Voltage Protection
- Thermal Overload Protection
- Priming / Degassing Valve
- LED Indicating Lights
- Splash Cover Over Controls
- 2 Year Warranty

## Application

MicroTron Series B metering pumps provide reliable, economical chemical addition for a wide variety of applications.

Precise stroking speed is maintained with a digitally accurate speed adjustment. Metering accuracy is achieved with double ball guided checks. A NEMA 4X style housing allows for outdoor installations.

Series B pumps are available in outputs up to 45 GPD and 250 PSI. The manual stroke length and digital speed adjustment provides a wide turn down capability on all models.

# Build a Model

## Model B \_ \_ \_ \_ \_ - \_ \_ \_ \_ \_

Build your model number by selecting one code from each step. Example: B130X1-KVC1

### STEP 1 ..... OUTPUT (MAXIMUM)

- 115 = 15 GPD / 2.37 LPH at 150 PSI (10.3 bar)
- 130 = 30 GPD / 4.70 LPH at 110 PSI (7.5 bar)
- 145 = 45 GPD / 7.09 LPH at 75 PSI (5.1 bar)
- 217 = 17 GPD / 2.60 LPH at 250 PSI (17.2 bar)

### STEP 2 ..... CONTROL OPTIONS

- X = Standard
- D = Dual Output 10-50 sph or 1-125 spm
- E = External Pace
- L = Limit Timer

### STEP 3 ..... VOLTAGE

- 1 = 120 Volt USA Plug
- 2 = 240 Volt
- 3 = 240 Volt Specified Plug
- 4 = 12 Volt Operation

### STEP 4 ..... HEAD MATERIAL

- K = Kynar
- S = Stainless

### STEP 5 ..... SEAT MATERIAL

- V = Viton
- F = Teflon
- H = Hypalon

### STEP 6 ..... CHECK BALL

- C = Ceramic
- D = Ceramic/single on discharge (pressure relief)
- S = Stainless

### STEP 7 ..... CONNECTIONS

- 1 = 3/8" (9.525 mm) Tubing - 75-200 PSI
- 2 = 1/4" (6.35 mm) Tubing - 250 PSI
- P = 1/4" (6.35 mm) MNPT Connections
- V = 3/8" (9.525 mm) Vinyl Suction Tubing - 110 or 250 PSI

For other options, see Price List or consult factory.

## Accessories

Standard models include everything needed for immediate start-up: injection, foot and priming valve assemblies plus suction and discharge tubing.

# Specifications

## Electrical

- Input - 120 VAC or 240 VAC @ 50/60 Hz

## Operational

- Stroke length adjustment - 10-100%
- Stroke frequency - 1-125 strokes/minute for 15, 30 & 17 GPD; 1 - 145 strokes / min. for the 45 GPD


## Enclosure

Heavy duty NEMA 4X style high impact thermoplastic with clear lexan cover.

## Environment

- Max temperature 140°F(60°C)
- Relative humidity 0 to 100%

**Shipping Weight:** Approximately 10 lbs. (4.536 kg)

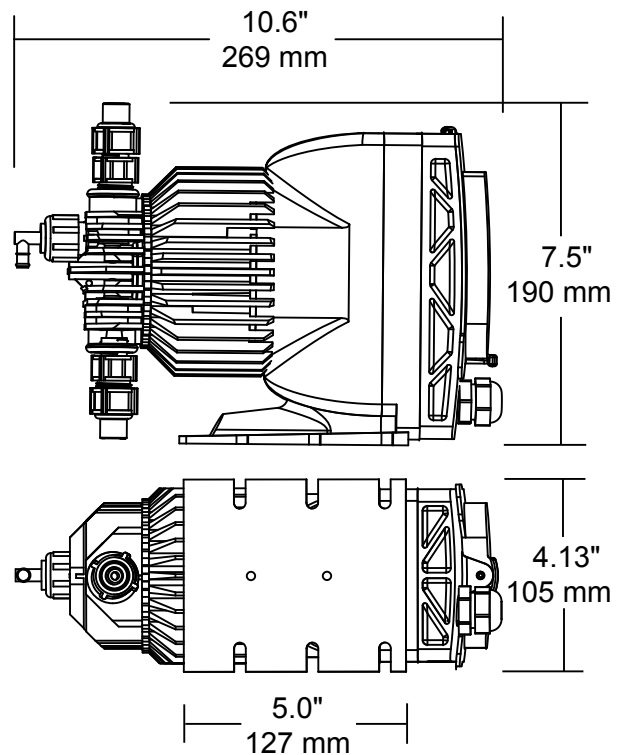

**Get the Advantage**



4700 Harold Abitz Dr  
Muskogee, OK 74403  
800-743-7431 phone  
888-686-6212 fax  
[www.advantagecontrols.com](http://www.advantagecontrols.com)