

Connecting to internet using a option “H” Wi-Fi card

This guide is designed to help with connecting a option “H” Wi-Fi MegaTron XS / MT to the internet.

Getting Started:

Before going onsite, contact the Advantage Controls’ customer service department by calling **918-686-6211** or visit our website at http://www.advantagecontrols.com/downloads_other.php and get the latest firmware version for the MegaTron XS / MT. Update the controller firmware following our upgrade instructions. Also, follow the supplied User ID Setup Quick Steps if your Megatron is not already registered with WebAdvantage.

Note: Screens may vary slightly between models.

Step 1:

Press **Setup/Run**, **CONFIGURE**, **NETWORK**, **WIFI**.

(See figures 1, 2, 3 and 4.)

Step 2:

Use the UP/DOWN arrows to change USE WI-FI FOR WEB to **ENABLE**. Press **Enter** to accept.

(See figure 5.)


Step 3:

Press **RESET** and then press **Enter** to accept. The communications card will reset after a short countdown.

(See figures 6 and 7.)

Step 4:

After the communications card has been reset, press the **SET/RUN** button to return to the RUN screen to save the changes. Then cycle power to the controller to initiate it trying to communicate on the new comm port.

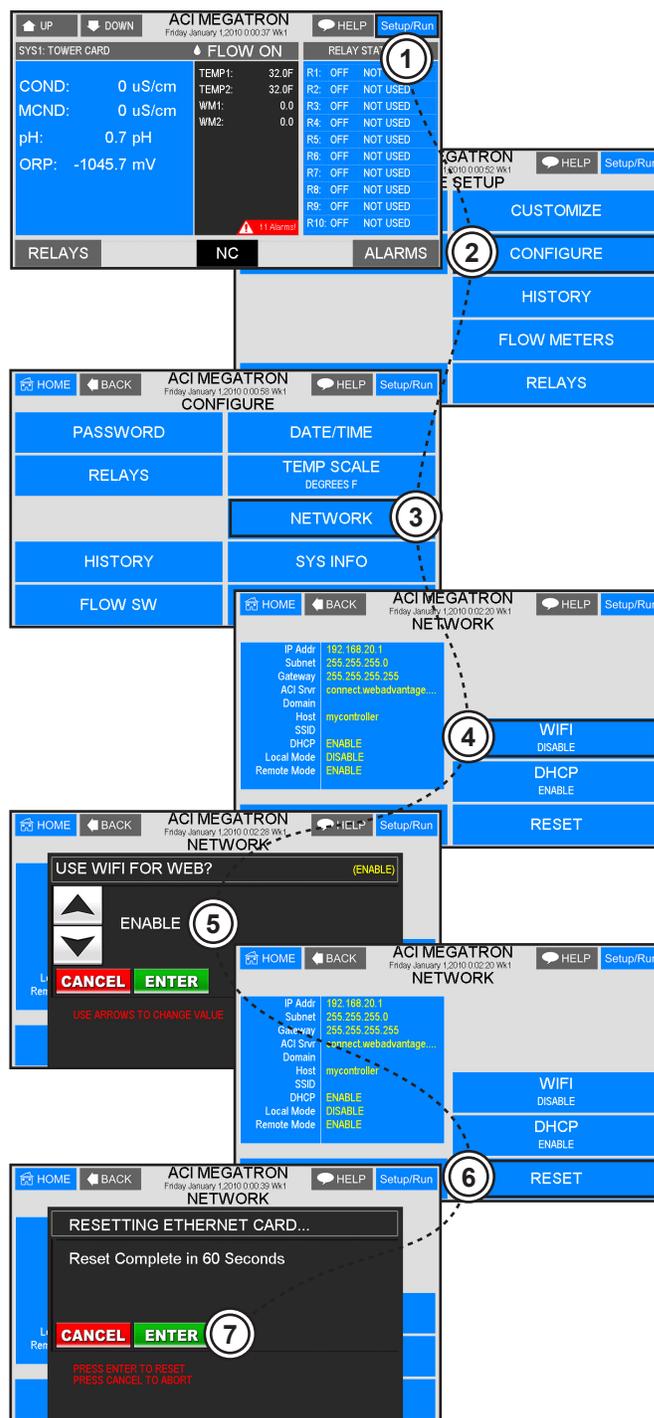

Connecting to internet using a option “H” WiFi card

Step 5:

After the controller reboots, press **Setup/Run**, **CONFIGURE**, **NETWORK**, **SETTINGS**, **WIFI NETWORK**.

(See figures 8, 9, 10, 11 and 12.)

Step 6:

Select your network and press **Enter** to accept.

(See figure 13.)

Step 7:

Enter your WiFi password then press **Enter** to connect.

Note: Blank passwords valid on some networks.

Step 8:

Press **Setup/Run**. When your controller is properly connected, a “ON WEB” message (MT models) or a “DR” message (XS models) will appear at the bottom/center of the Setup/Run screen.

(See figure 14.)

