


Sample Stream Accessories




FLOW-2HT
Flow Indicator
3/4" NPTM
Stainless fittings(304)
Polysulfone (PSU)
Body & Piston
Viton O-ring
10 GPM max
230 psi max
300°F max
8 1/2" long
Installs at any angle

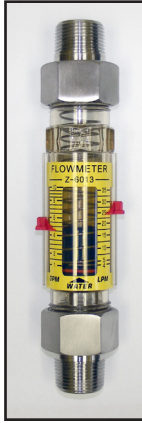


FLOW-75-10A
Flow Indicator
3/4" NPTM
PVC fittings
Polysulfone body
Viton O-ring
10 GPM max
75 psi @ 130°F
120 psi @ 75°F
7 1/2" long
Installs vertically



FLOW RESTRICTORS
3/4" PVC • 125 psi max
OR-3-BE • 3 GPM • Brass
OR-3-BEP • 3 GPM • PVC
OR-5-BE • 5 GPM • Brass
OR-5-BEP • 5 GPM • PVC
OR-8-BE • 8 GPM • Brass
OR-8-BEP • 8 GPM • PVC



FS-PT
Paddle style flow switch
1/2" MNP(CPVC) for:
1" PVC tee 150 psi @ 75°F
3/4" Brass tee 250 psi @ 75°F



BACK CHECK VALVE
Only allows fluid to travel
one direction
3/4" NPTM
Polypropylene fittings
120 psi @ 75°F



INJ-1 INJECTION TEE
Quick release
3/4" PVC tee with
1/2" FNPT collar

(Pump injection
fitting not included)



Y-TEE LINE STRAINER
Polypropylene/PVC fittings
Steel mesh filter
75 psi max
150°F max
YP-3/4
YP-1



INLINE BASKET STRAINER
Steel mesh filter (20x20)
Model **A** **B**
BL- 3/4- BLK 3 1/2" 5"
BL-1 5" 6"
BL-1-CL (Clear) 5" 6"

